


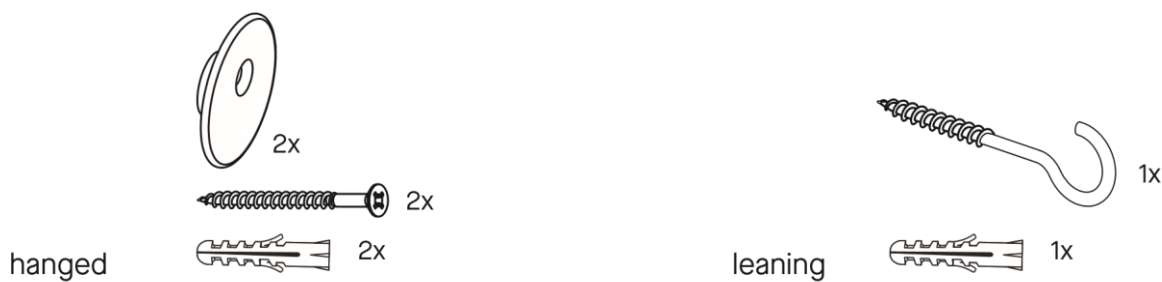

INSTRUCTION MANUAL

accessories delivered with the mirror

**Hanged:**

- remove the chain from the back of the mirror
- drill two hole at the desired height and use provided plugs (only for solid walls)
- hang the mirror vertically or horizontally

Leaning:

- drill a hole at 140cm from the floor, positioned behind the mirror
- install the provided hook
- fix the black protection profiles at the bottom of the mirror frame-
fasten the chain at the back of the mirror to the hook installed

200-240 VAC 50 Hz

Lamp type: RGB SMD5050, lifetime 30000h

IP20      